



access units
MOTION 868 MHz range

Applicable to doors
roller · folding · sliding · swing · sectional
guillotine · fast · glass · revolving · barriers
posts

FreeT

hands-free system for
vehicles and people










jcmtechnologies
be a step ahead with technology and imagination



FreeT · Free15r · Free30r · Free50r




TAG	ACCESSORIES
 <h3>FreeT</h3> <ul style="list-style-type: none"> · Nominal range: 100 metres. · Transmission frequency: 868 MHz. · Power: 1 x 3Vdc batteries type CR2032. · Batteries last for approximately 2 years. · Acoustic operating indicator for low battery, signal transmission and programming. · Button inlet for voluntary triggering and start-up in the event of automatic disconnection. · Operating temperature -20°C a + 55°C. · ABS plastic case. · Size: 65 x 55 x 10 mm. 	 <p>Tag holder for car dashboards.</p> <p>Clip.</p>
ANTENNA	
   <h3>Free15r · Free30r</h3> <ul style="list-style-type: none"> · Free15r nominal range: 1.5 metres. · Free30r nominal range: 3 metres. · Transmission frequency: 125 KHz. · Power: 12/24Vac/dc. · LED operations indicator. · Button input for channel and/or group programming. · Pre-wired connection. · Operating temperature -20°C a + 55°C. · ABS IP66 plastic case. · Size of Free30r: 205 x 183 x 14 mm. · Size of Free15r: 87 x 78 x 15 mm. <h3>Free50r</h3> <ul style="list-style-type: none"> · Triggers with activation input · Free50r nominal range: 5 metres. · Power: 230Vac. · LED operations indicator. · Button input for channel and/or group programming. · Pre-wired connection. · Operating temperature -20°C a + 55°C. · ABS IP66 plastic case. · Size of Free50r: 394,4 x 310,5 x 41,6 mm. 	 <p>Wall support Free30r.</p>  <p>Wall support Free50r.</p>
RECEIVERS	
<p>Receivers MOTION. BASE, WAVE, STICK, CONNECT, ACCESS500, ACCESS1000 and operating panels with built-in receiver.</p>	



GROUP CONCEPT

Group 1

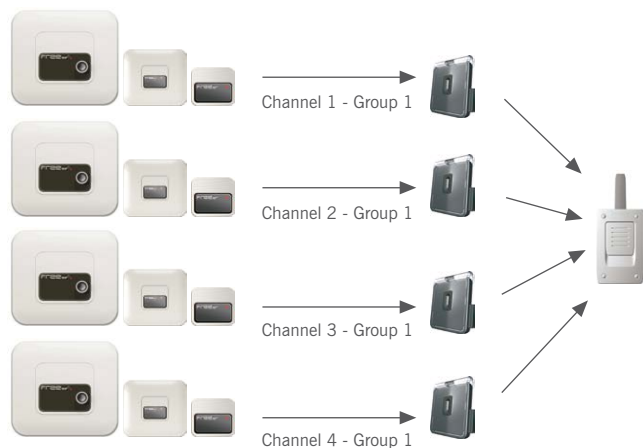

Group 2

